



rear panel bus module 110 mm for ET 200pro motor starter isolator modules and
ASM disconnecting module 400 V

Substance Prohibittance (Date)	05/01/2012
Weight	0.242 kg
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00
touch protection on the front according to IEC 60529	finger-safe
Ambient conditions	
ambient temperature	
• during operation	55 ... -25 °C
• during storage	-40 ... +70 °C

Approvals Certificates		
General Product Approval	EMV	Test Certificates




[Type Test Certificates/Test Report](#)

other	Environment
Confirmation	Environmental Confirmations

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1922-2BA00>
Cax online generator
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1922-2BA00>
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<https://support.industry.siemens.com/cs/ww/en/ps/3RK1922-2BA00>
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1922-2BA00&lang=en

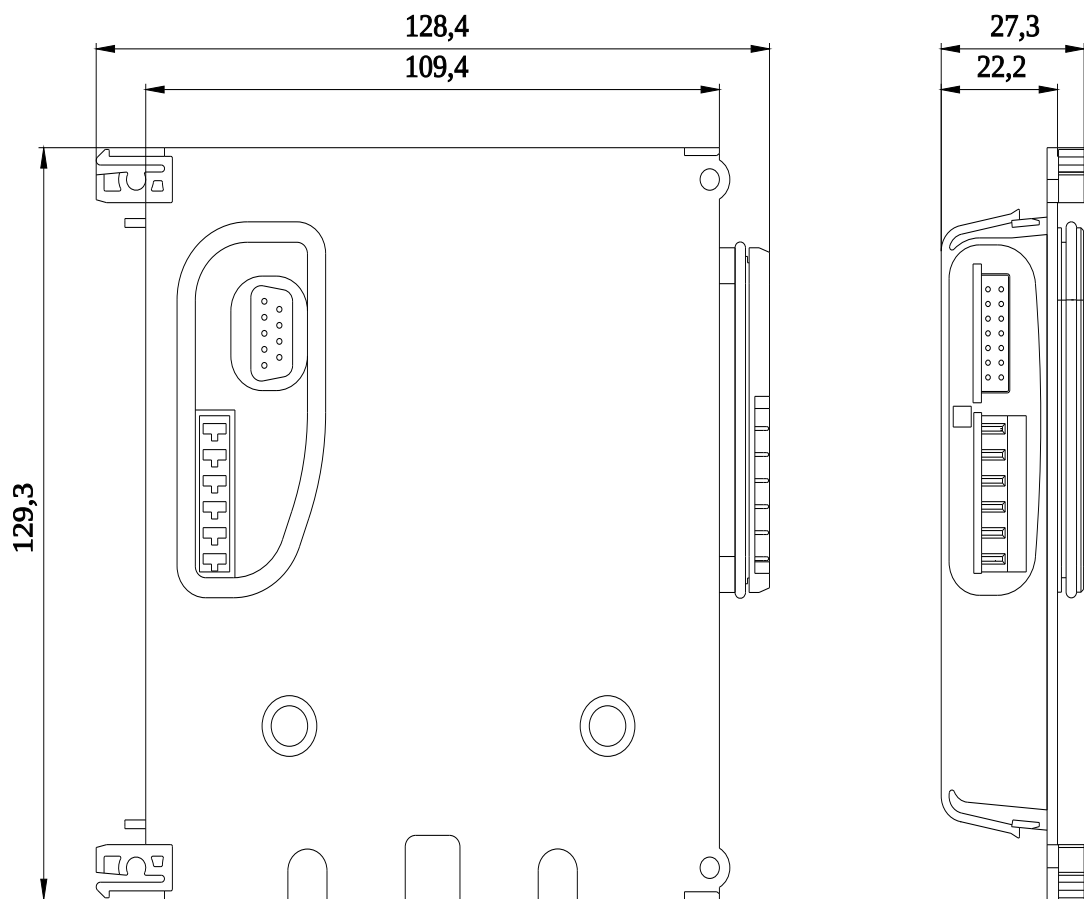

last modified:

4/2/2025 