


BES Q40KFU-PAC20B-S04G BES0217



1) Sensing surface

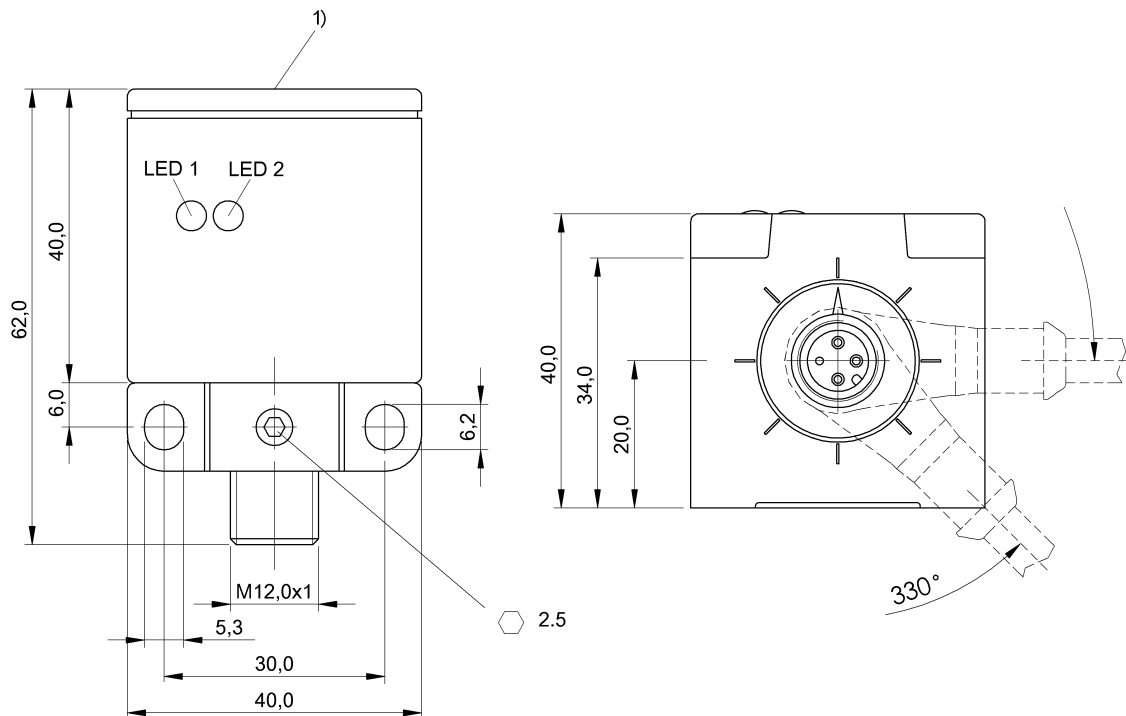

IND. CONT. EQ
8102
for use in the secondary of
a class 2 source of supply
Environmental - Type 1 Enclosure



Display/Operation

Function indicator	yes
Power indicator	yes

Electrical connection

Connection	M12x1-Connector, 4-pole, A-coded
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

Hysteresis H max. (% of Sr)	15.0 %
Load capacitance max. at Ue	1 µF
MTTF (40 °C)	455 a
No-load current Io max., undamped	15 mA
Operating voltage Ub	10...30 VDC
Output resistance Ra	33.0 kOhm + D
Pollution degree	3
Protected against miswiring	yes
Rated insulation voltage Ui	250 V AC
Rated operating current Ie DC	200 mA

Rated operating voltage Ue DC	24 V
Rated short circuit current	100 A
Ready delay tv max.	30 ms
Repeat accuracy max. (% of Sr)	5.0 %
Residual current Ir max.	80 µA
Switching frequency	50 Hz
Utilization category	DC -13
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...70 °C
Protection class	II
Protection type IEC 60529	IP67

Functional safety

Diagnostic coverage	0 %
Functional safety	no
Mission Time	20 a

BES Q40KFU-PAC20B-S04G BES0217

General data

Approval/Conformity	cULus CE EAC
Basic standard	IEC 60947-5-2
Trademark	Global

Material

Housing material	PBT
Material sensing surface	PBT

Mechanical data

Dimension	40 x 40 x 62 mm
Installation	for flush mounting
Tightening torque	40 Nm

Output/Interface

Switching output	PNP Normally open/Normally closed (NO/NC)
------------------	---

Range/Distance

Assured operating distance Sa	16 mm
Range	20 mm
Rated operating distance Sn	20 mm
Ripple max. (% of Ue)	15 %
Temperature drift max. (% of Sr)	10 %

Remarks

LED 1: Function
LED 2: Operating voltage
The sensor is functional again after the overload has been eliminated.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.

Connector view



Wiring Diagram

